

BME688



BME688 Environmental Sensor 4-in-1

v1.0

2025-09-30

Rev. A


Professional electronic component

PRODUCT OVERVIEW


The BME688 Environmental Sensor 4-in-1 is a compact module that integrates temperature, humidity, barometric pressure, and gas sensing (including VOCs and IAQ) in a single package. Based on Bosch Sensortec technology, it offers digital I²C/SPI interfaces for easy integration with platforms like Arduino, ESP32, and Raspberry Pi. Its low power consumption and small size make it ideal for wearables, portable devices, and IoT applications. The sensor also supports AI-based gas classification via Bosch's BME AI-Studio, enabling advanced air quality monitoring.

PRODUCT VIEWS

TOP VIEW

*Component placement and connectors*

BOTTOM VIEW

*Underside components and connections*

KEY TECHNICAL SPECIFICATIONS



CONNECTIVITY

Primary Interface:	GPIO (Interrupt)
Connector Type:	JST 4-pin 1.0mm
Logic Levels:	VCC-referenced (2V – 5.5V tolerant)

KEY FEATURES

Relative Humidity Accurately measures ambient moisture for precise environmental monitoring.	Barometric Pressure Detects atmospheric pressure changes to support dynamic weather tracking.
Excellent Temperature Stability Delivers consistent temperature readings even under varying conditions.	Gas Sensing Monitors a range of gases to help identify potential environmental hazards.
Power Consumption: Optimized for low power usage, making it ideal for battery-operated devices.	Interfaces: I ² C and SPI
Input Voltage via VCC Pin: 3.6–6.0 V (through onboard voltage regulator)	

ADDITIONAL TECHNICAL INFORMATION



OVERVIEW

PARAMETER	VALUE/DESCRIPTION
Operating Voltage	1.71V to 3.6V
Supply Current	0.9 μA (sleep), 2.1 μA (ULP), ~920 μA (gas scan)
Operating Temperature	-40°C to +85°C
Relative Humidity Range	0% to 100% RH
Pressure Range	300 hPa to 1100 hPa
Gas Sensing	VOCs, IAQ index via integrated gas sensor
Interfaces	I ² C and SPI (up to 3.4 MHz)
Package Size	3.0 × 3.0 × 0.93 mm ³

TECHNICAL SPECIFICATIONS


PARAMETER	TECHNICAL DATA
Package dimensions	8-Pin LGA with metal 3.0 x 3.0 x 0.93 mm ³
Operation range (full accuracy)	Pressure: 300...1100 hPa Humidity: 0...100% Temperature: -40...85°C
Supply voltage VDDIO	1.2 - 3.6 V
Supply voltage VDD	1.71 - 3.6 V
Interface	I ² C and SPI
Average current consumption	2.1 µA at 1 Hz humidity and temperature 3.1 µA at 1 Hz pressure and temperature 3.7 µA at 1 Hz humidity, pressure and temperature 90 µA at ULP mode for p/h/T & air quality 0.9 mA at LP mode for p/h/T & air quality 3.9 mA in standard gas scan mode (gas scan mode & scan rate can be optimized on applications with BME AI studio)
Gas sensor - F1 score for H ₂ S scanning	0.94
Gas sensor - Standard scan speed	10.8 s / scan
Gas sensor - Electric charge for standard scan	0.18 mAh (5 scans ~ 1 min)
Gas sensor - Response time (τ 33-63%)	< 1 s (for new sensors)
Gas sensor - Sensor-to-sensor deviation	+/- 15%
Gas sensor - Power consumption	< 0.1 mA in ultra-low power mode
Gas sensor - Output data processing	Major direct outputs: Index for Air Quality (IAQ), bVOC- & CO ₂ -equivalents (ppm), Gas scan result (%) & many more (all listed in datasheet in Table 20: BSEC outputs)
Humidity sensor - Response time (τ 0-63%)	8 s
Humidity sensor - Accuracy tolerance	± 3 % relative humidity
Humidity sensor - Hysteresis	≤ 1.5 % relative humidity
Pressure sensor - RMS Noise	0.12 Pa (equiv. to 1.7 cm)
Pressure sensor - Sensitivity Error	± 0.25 % (equiv. to 1 m at 400 m height change)
Pressure sensor - Temperature coefficient offset	±1.3 Pa/K (equiv. to ±10.9 cm at 1°C temperature change)

TECHNICAL SPECIFICATIONS

PARAMETER	TECHNICAL DATA
Package dimensions	8-Pin LGA with metal 3.0 x 3.0 x 0.93 mm ³
Operation range (full accuracy)	Pressure: 300...1100 hPa Humidity: 0...100% Temperature: -40...85°C
Supply voltage VDDIO	1.2 - 3.6 V
Supply voltage VDD	1.71 - 3.6 V
Interface	I ² C and SPI
Average current consumption	2.1 µA at 1 Hz humidity and temperature 3.1 µA at 1 Hz pressure and temperature 3.7 µA at 1 Hz humidity, pressure and temperature 90 µA at ULP mode for p/h/T & air quality 0.9 mA at LP mode for p/h/T & air quality 3.9 mA in standard gas scan mode (gas scan mode & scan rate can be optimized on applications with BME AI studio)
Gas sensor - F1 score for H ₂ S scanning	0.94
Gas sensor - Standard scan speed	10.8 s / scan
Gas sensor - Electric charge for standard scan	0.18 mAh (5 scans ~ 1 min)
Gas sensor - Response time (τ 33-63%)	< 1 s (for new sensors)
Gas sensor - Sensor-to-sensor deviation	+/- 15%
Gas sensor - Power consumption	< 0.1 mA in ultra-low power mode
Gas sensor - Output data processing	Major direct outputs: Index for Air Quality (IAQ), bVOC- & CO ₂ -equivalents (ppm), Gas scan result (%) & many more (all listed in datasheet in Table 20: BSEC outputs)
Humidity sensor - Response time (τ 0-63%)	8 s
Humidity sensor - Accuracy tolerance	± 3 % relative humidity
Humidity sensor - Hysteresis	≤ 1.5 % relative humidity
Pressure sensor - RMS Noise	0.12 Pa (equiv. to 1.7 cm)
Pressure sensor - Sensitivity Error	± 0.25 % (equiv. to 1 m at 400 m height change)
Pressure sensor - Temperature coefficient offset	±1.3 Pa/K (equiv. to ±10.9 cm at 1°C temperature change)


HARDWARE DOCUMENTATION

MECHANICAL DIMENSIONS

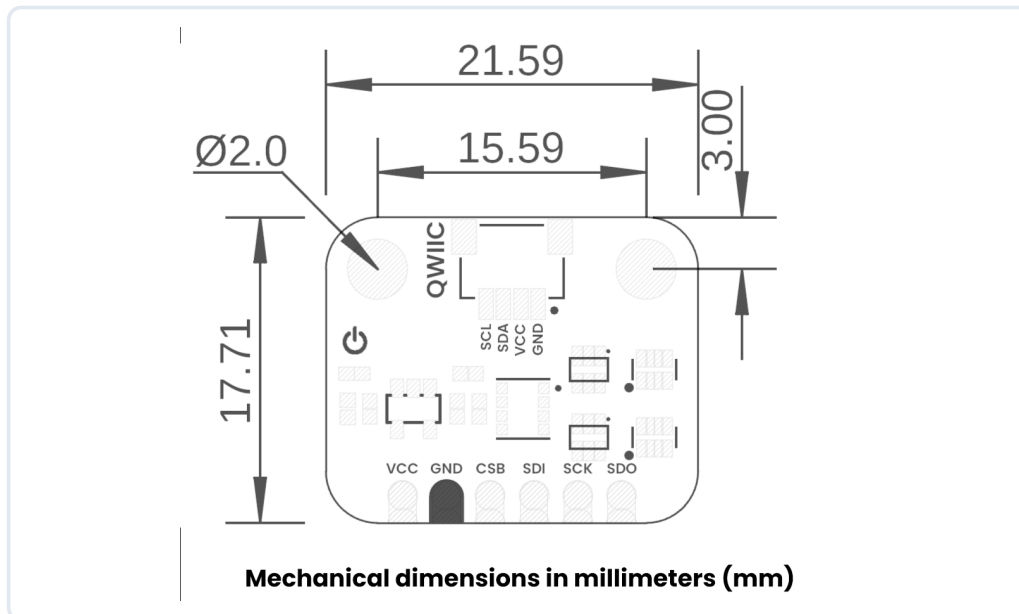


Physical dimensions and mounting specifications (measurements in millimeters)

SYSTEM TOPOLOGY

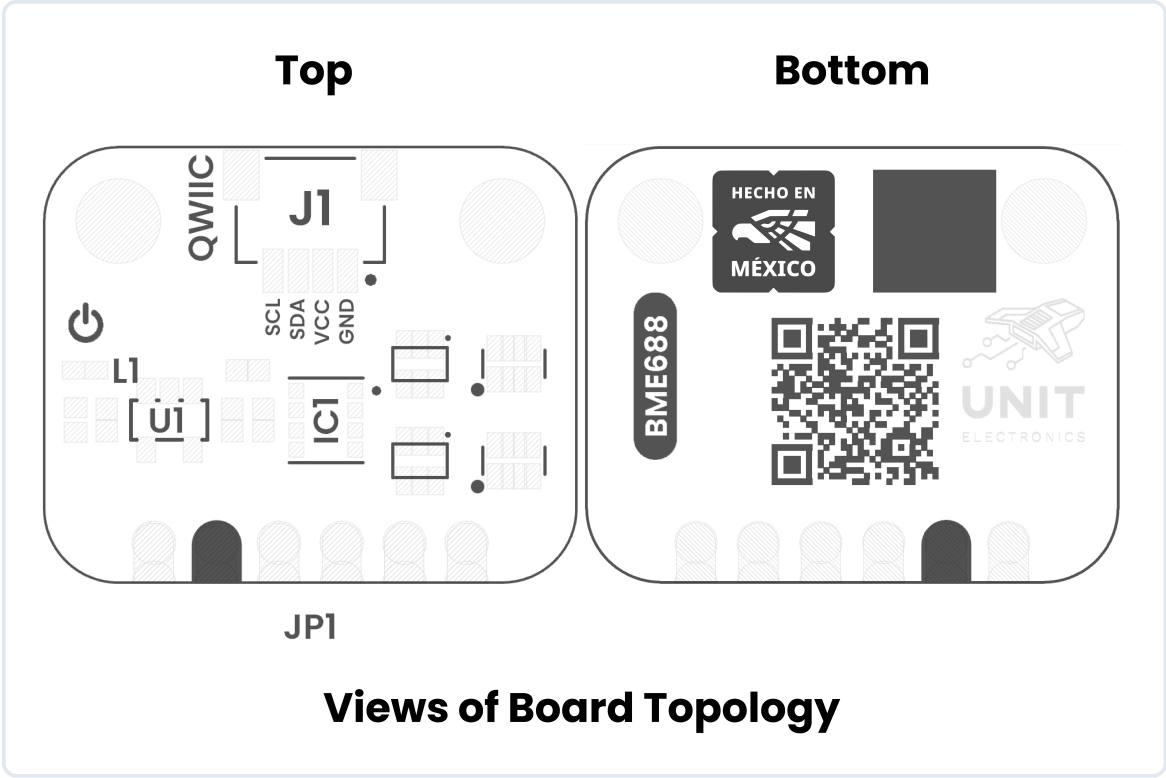

CIRCUIT SCHEMATIC

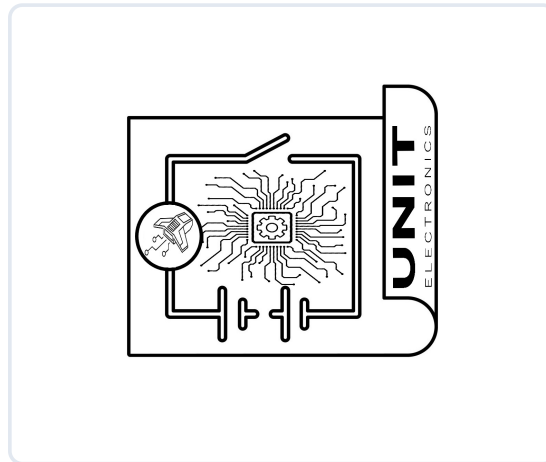

Complete circuit schematic showing all component connections

[View Complete Schematic PDF](#)

PIN DESCRIPTION

Detailed pin assignment and electrical specifications

SIGNAL DESCRIPTION

PIN LABEL	DESCRIPTION
VCC	Power supply (3.3V or 5V)
GND	Ground
SDA/SDI	I ² C data / SPI data in
SCL/SCK	I ² C clock / SPI clock
CSB	Chip select (SPI, active low)
SDO	SPI data out


PIN LABEL	DESCRIPTION
VCC	Power supply (3.3V or 5V)
GND	Ground
SDA/SDI	I ² C data / SPI data in
SCL/SCK	I ² C clock / SPI clock
CSB	Chip select (SPI, active low)
SDO	SPI data out

PIN CONFIGURATION LAYOUT


Physical connector layout and pin positioning

PINOUT UNIT BME688



Top view

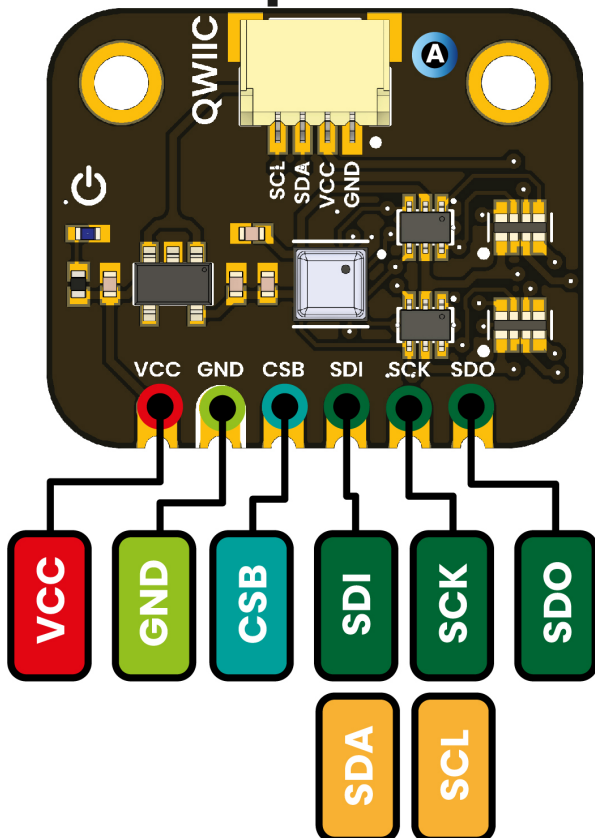

Bottom view

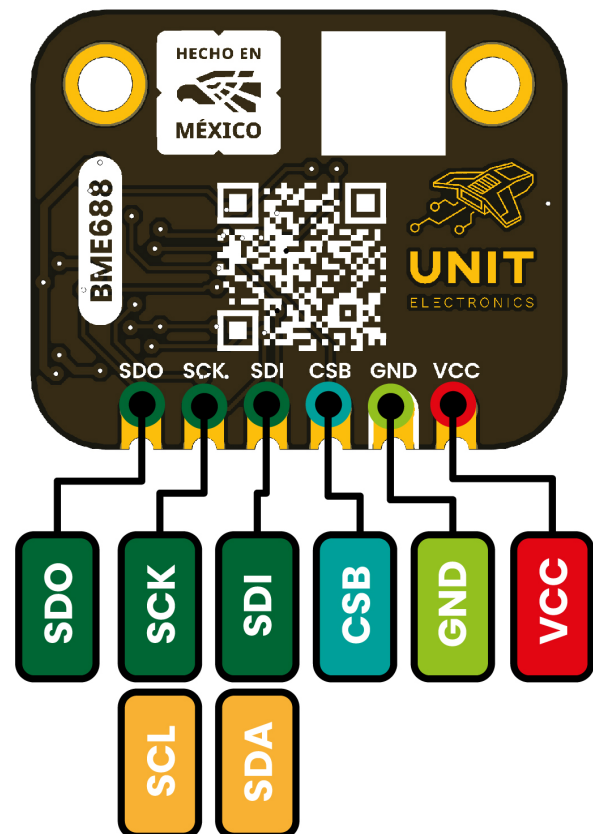

Description:

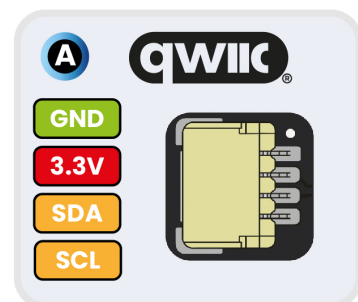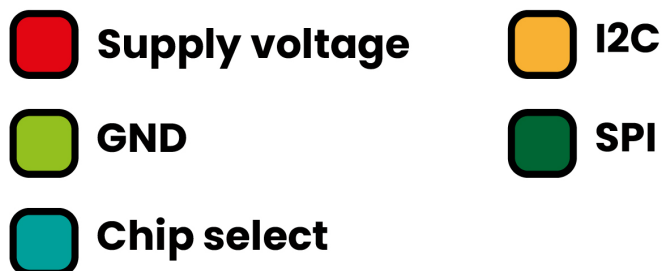

Complete pin configuration diagram showing all connectors, pin assignments, and electrical connections for proper integration